

CITY OF HERMISTON
PERMIT TO UTILIZE
CITY RIGHT-OF-WAY

APPLICANT INFORMATION;

NAME; _____ TELEPHONE; _____

ADDRESS; _____

JOB LOCATION;

ADDRESS; _____

Please attach map including at least a one block area around work site.

NATURE OF WORK;

Sewer Water Utility Sidewalk Removal/Installation Driveway

1) Do work areas extend outside of your Property Line? YES (call for permit review) NO

Describe work to be done; _____

2) Is area to be excavated a hard surface? YES (call for permit review) NO

DATE WORK TO BEGIN; _____ WORK END DATE; _____

(Permit shall be filed 72 hours in advance of beginning work)

For permit review contact; Ron Sivey 541-561-7605

CONTRACTOR INFORMATION;

NAME; _____ LICENSE NO; _____

ADDRESS; _____ CITY; _____ STATE; _____ ZIP; _____

IF YOU ARE NOT A PUBLIC UTILITY, WHO IS YOUR LIABILITY INSURANCE CARRIER?

NAME; _____ POLICY NO; _____

ADDRESS; _____ CITY; _____ STATE; _____ ZIP; _____

PLEASE INITIAL INDICATING YOU HAVE READ, SUPPLIED AND AGREE TO COMPLY WITH THE FOLLOWING

Hard surface replacement must be completed by the work end date. If not completed within this Time, the City may complete the repairs and bill the applicant.

Compaction testing is required on all trenches in the ROW. See Trench Back Fill spec ST 301

A Traffic Control Plan has been provided with this permit application.

Determined by City; Penalty for cutting a new street; A permit fee in the amount of \$ _____ will need to be paid before permit is issued. Permit fee is based on ordinance # 1942. This street is less than _____ years old, thus requiring a fee _____ times the repair rate.

The City must be notified a minimum of 24 hours before backfilling for inspection. The applicant agrees to the terms and provisions governing this permit.


Applicant's Signature; _____ Print; _____

City Contacts;

Water 667-5064 Sewer 567-5272 Street 667-5062 Police 567-5519 City Hall 567-5521

Send copy to; _____ Street Dept. _____ WWPT _____ Other	Received; _____ By; _____ Approved: _____ Date; _____
--	---

CALL BEFORE YOU DIG!!!! 1-800-332-2344

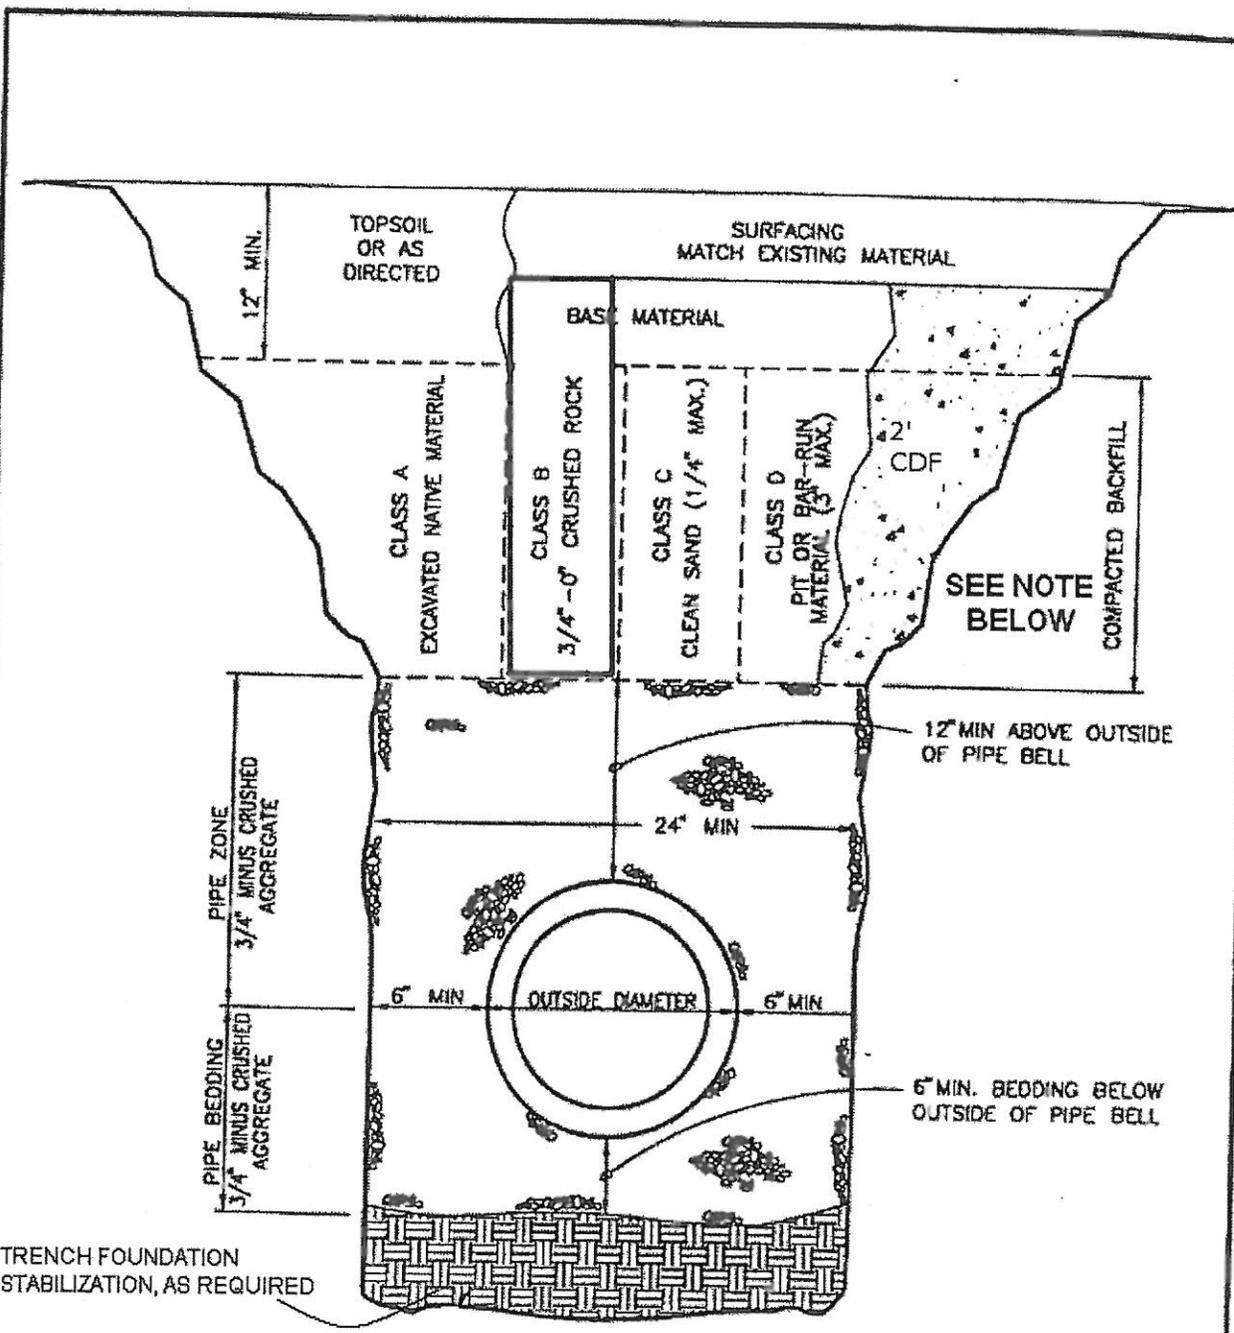

NOTES; Per. City of Hermiston Street Department

- 1) Surfacing of paved areas shall comply with standard street drawings.
- 2) Acceptable Trench Back Fill Shall Be;
 - ** Oregon State Spec HWY Rock 3/4" - 0" or 1 1/2" - 0"
 - ** Placed and compacted in 6" lifts
 - Trench depth of less than 1ft. Visual inspection by City
 - Trench depth 1ft. to 4 ft. -- Compaction tests at finish rock grade every 10 ft. of length.
 - Trench depth over 4 ft. Contact Street Superintendent

APWA OREGON CHAPTER	
TRENCH BACKFILL, BEDDING, AND PIPE ZONE	
DATE:	DRAWING NO.
AUG 1996	301